

KEPSTAN[®]

BY ARKEMA


PEKK – POLYETHER KETONE KETONE

Kepstan[®] PEKK




KEPSTAN® PEKK RANGE

Kepstan® PEKK is a member of the Poly Aryl Ether Ketone (PAEK) family, which has the uncommon make-up of being a copolymer that contains terephthalic and isophthalic moieties.

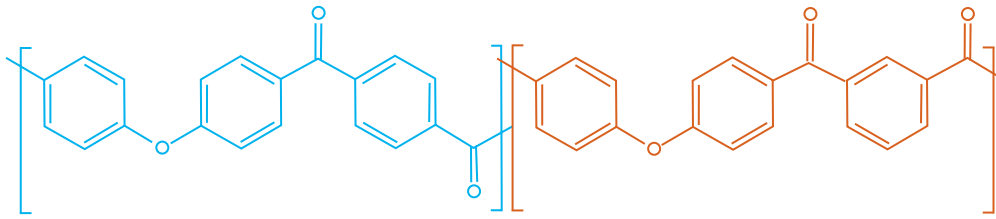

The T/I ratio is set at the synthesis level and controls thermal properties and crystallization kinetics of the resulting polymer. Kepstan® PEKK comes in three “series,” each with a different T/I ratio as designed by Arkema to better fit application requirements.

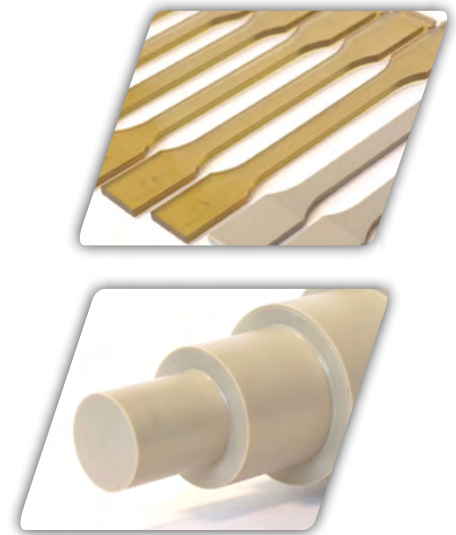


KEPSTAN® PEKK SERIES

SERIES	T/I RATIO	TM	TG	CRYSTALLIZATION SPEED
8000	80/20	358°C	165°C	Fast/Semi-Crystalline
7000	70/30	332°C	162°C	Medium/Semi-Crystalline
6000	60/40	305°C	160°C	Slow/Semi-Crystalline

For each series, two levels of viscosity are offered for better adaptation to the processing technique. Kepstan® PEKK is sold as pellets and powder in the virgin state or compounded with glass fiber or carbon fiber.

TENSILE STRENGTH AND MODULUS

■ Tensile Strength (MPa) ■ Tensile Modulus (GPa)

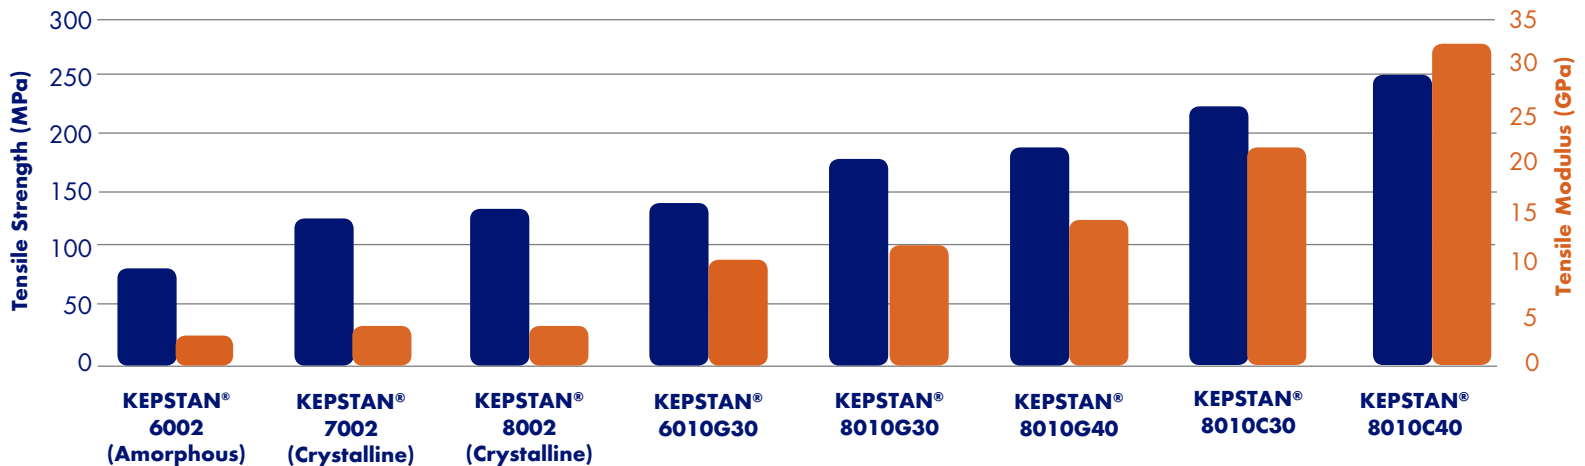


KEPSTAN® PEKK FEATURES

Kepstan® PEKK provides a unique combination of properties over a very wide range of temperature period. This polymer family has exceptional advantages for processing and expands the application possibilities offered by the PAEK family.


- High temperature resistance
 - Highest Tg of PAEK
 - Tm range 305 - 358°C
- High tensile and compression strength/high stiffness
- High chemical resistance in harsh conditions
- Excellent fire properties
 - Low smoke and toxicity
 - Inherently flame retardant
- High purity, very low extractibles
- Processable by all conventional high temperature extrusion and molding techniques
- Exceptional possibilities and advantages in additive manufacturing and composites



FLEXURAL DMTA

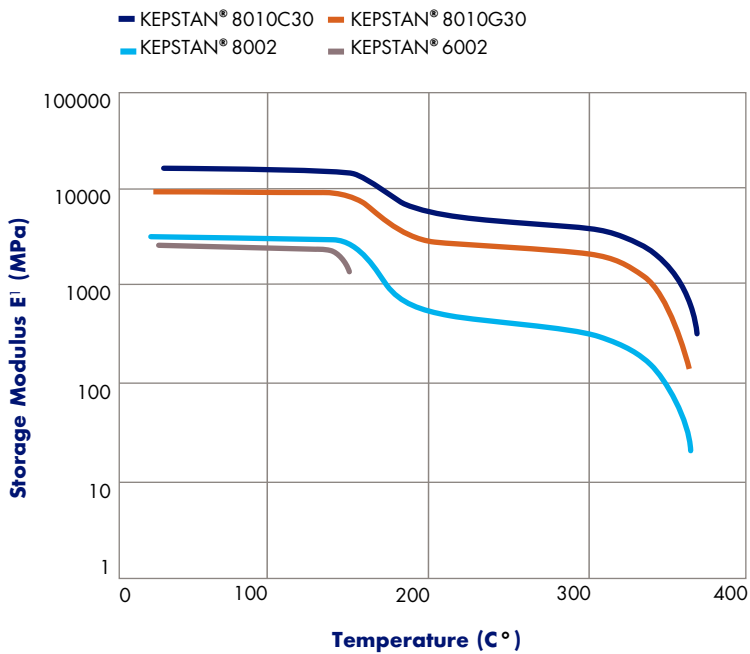

RHEOLOGY

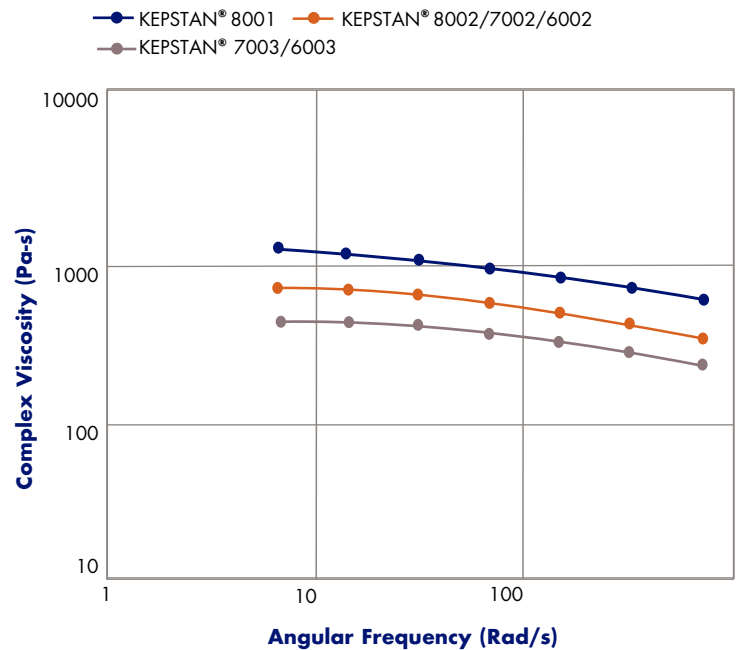

APPLICATIONS & PROCESSING TECHNIQUES



GRADE	FORM	VISCOSITY	APPLICATION
KEKSTAN® PEKK 8000 SERIES		Highest thermo-mechanical properties	
8001	Pellets	High	Stock shape extrusion/injection molding
8002	Pellets	Medium	Injection molding
8002PL	50µm Powder	Medium	Powder coating



GRADE	FORM	VISCOSITY	APPLICATION
KEKSTAN® PEKK 7000 SERIES		Excellent choice for structural composites	
7002	Pellets	Medium	Film extrusion
7002PL	50µm Powder	Medium	Fabric coating/Prepreg
7002PT	20µm Powder	Medium	UD Tapes
7003	Pellets	Low	Film extrusion
7003PL	50µm Powder	Low	Fabric coating/Prepreg
7003PT	20µm Powder	Low	UD Tapes



GRADE	FORM	VISCOSITY	APPLICATION
KEKSTAN® PEKK 6000 SERIES		Highly versatile copolymer	
6002	Pellets	Medium	Extrusion film/Sheet/Thermoforming
6002PL	50µm Powder	Medium	Additive manufacturing/Powder coating
6003	Pellets	Low	Extrusion film
6003PL	50µm Powder	Low	Additive manufacturing/Powder coating

KEKSTAN® PEKK COMPOUNDS



GRADE	FILLER	BASE POLYMER	APPLICATION
6010G30	30% Glass	6000	Injection molding Stock shapes extrusion
8010G30	30% Glass	8000	
8010G40	40% Glass	8000	
8010C30	30% Carbon	8000	
8010C40	40% Carbon	8000	

Please consult Arkema's disclaimer regarding the use of Arkema's products at <http://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Kepstan® is registered trademarks of Arkema.
© 2018 Arkema Inc. All rights reserved.

extremematerials-arkema.com

Contact Information
 China: +86 21 61476888
 Japan: +81 3 5251 9900
 Korea: +82 2 370367000
 Singapore: +65 64199199
 Taiwan: +886 2 27476979
 India: +91 22 66137500

Arkema Inc. (Americas)
 900 First Avenue
 King of Prussia, PA 19406
 Tel.: +1 610 205 7000
 Fax: +1 610 205 7497
arkema-americas.com

Headquarters: Arkema France
 420, rue d'Estienne d'Orves
 92705 Colombes Cedex – France
 Tel.: +33 (0)1 49 00 80 80
 Fax: +33 (0)1 49 00 83 96
arkema.com

ARKEMA
 INNOVATIVE CHEMISTRY

Arkema - a French "société anonyme", registered with the Commercial and Companies Register of Nanterre under number 319 632 790 08.2018/PFC-VSM/Photos: Rich, Quindry and Shutterstock